

LINKO 900 - SERIES

Smart Electronic Lock

A modern solution for individuals and businesses looking to upgrade their security systems while improving convenience and operational efficiency.



Application



Bluetooth



IC card



High
Security



Fingerprint



Low Voltage
Alarming



Mechanical
key



Passcode



Wi-Fi

SKU:LOT-24816





LINKO 900 - SERIES



Exterior



Interior

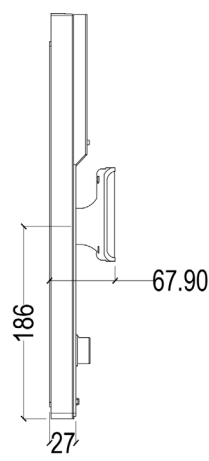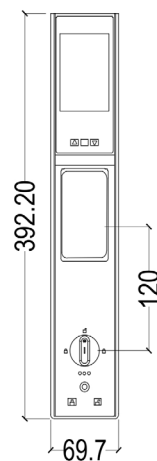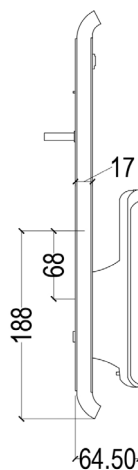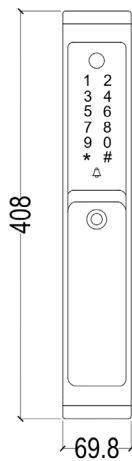

Finishes  Satin Nickel

FEATURES

- ✓ Aluminum alloy handles with self-lubricating long-life bearings.
- ✓ 5- Point steel latch construction with an anti-friction mechanism.
- ✓ Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy egress in emergency situations.
- ✓ Long lasting Escutcheon and durable handle levers.
- ✓ Lock programming and audit records are not erased during the battery replacement.
- ✓ Powered by 4200 mAh rechargeable lithium battery that provides up to 6-12 months normal life.
- ✓ Unlock with Application, Fingerprint, IC Card, Mechanical Key and Passcode.
- ✓ Check latest 6 months' operation records in LinkO App.
- ✓ Easy to install with minimal drilling required.
- ✓ Emergency charging available when battery power is low.
- ✓ Lock case made of stainless steel, improve safety factor.
- ✓ Built-in 100 MP camera and doorbell.
- ✓ Built-in 3.0-inch LED display.

TECHNICAL SPECIFICATIONS

Material	5# Zinc alloy, 304# stainless steel, ABS
Available Color	Satin Nickel
Door Thickness	40-70(mm)
Communication	Bluetooth 4.0 BLE or Wi-Fi
Battery Life	10,000 times normal open (12 months)
Power Supply	4200 mAh rechargeable lithium battery
Static Current	30uA
Dynamic Current	<200mA
Unlock Method	Application, Fingerprint, IC Card, Mechanical Key and Passcode.
Unlock Time	1-1.5 seconds
Working Temperature	-25°C~70°C
Working Humidity	10%~95%
Available Mortise	Stainless steel 6068 Mortise
User Capacity	IC Card:200 groups, Fingerprint:100 groups, Password:150 groups
Emergency Open	Type C power supply or Mechanical Key
Packing	Carton box with EPE inside
Comply to	EN 14846