

LINKO 740 - SERIES

Smart Electronic Lock

Expertly optimized for aluminum-framed glass profiles, this stainless steel solution delivers a seamless, high-integrity fit for specialized architectural entries.



Application



Bluetooth



IC card



High
Security



Fingerprint



Low Voltage
Alarming



Mechanical
key




Passcode



Wi-Fi

SKU:LOT-24814

LINKO 740 - SERIES

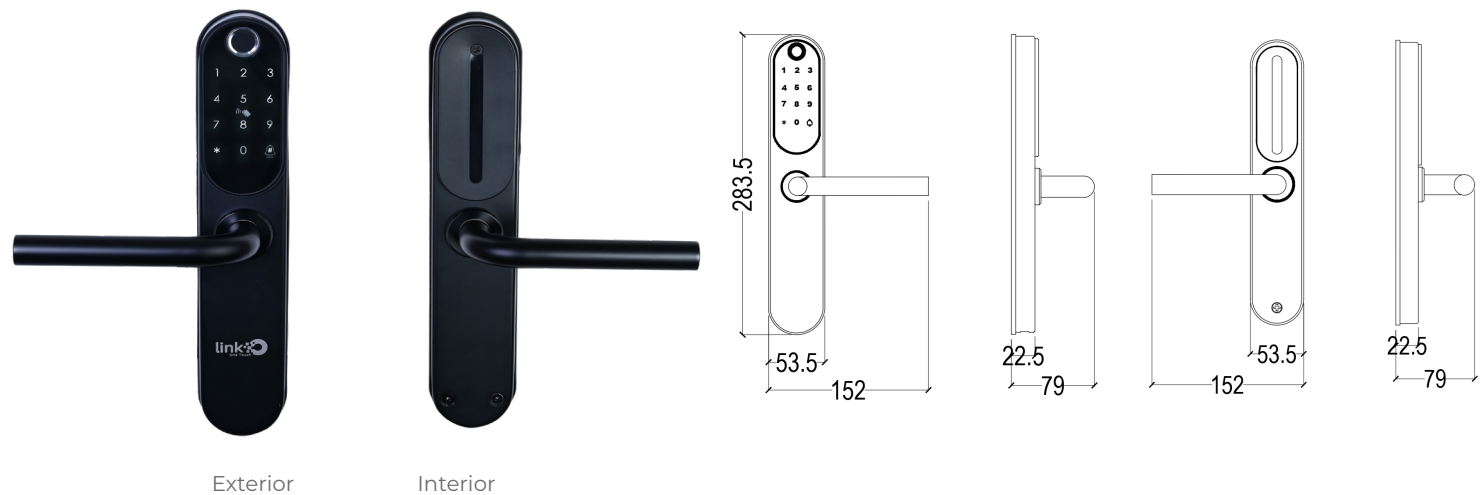

Finishes  Black Nickel  Satin Nickel  Gold Nickel

FEATURES

- ✓ Aluminium alloy handles with self-lubricating long-life bearings.
- ✓ 2-Point steel latch construction with an anti-friction mechanism.
- ✓ Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy egress in emergency situations.
- ✓ Long lasting Escutcheon and durable handle levers.
- ✓ Lock programming and audit records are not erased during battery replacement.
- ✓ Powered by four (4) AAA batteries that provides up to 6-12 months normal life.
- ✓ Unlock with Application, Fingerprint, IC Card, Mechanical Key and Passcode.
- ✓ Check all open records on LinkO app.
- ✓ Easy to install with minimal drilling required.
- ✓ Emergency charging available when battery power is low.
- ✓ Lock Case made of stainless steel, improve safety factor.

TECHNICAL SPECIFICATIONS

Material	Escutcheon and Handles (Aluminum alloy) RFID and password Cover: ABS
Available Color	Black Nickel, Gold Nickel and Satin Nickel
Door Thickness	40-60(mm)
Communication	Bluetooth 4.0 BLE or Wi-Fi
Battery Life	10,000 times normal open (12 months)
Power Supply	DC6v: 4pcs AAA Alkaline batteries
Static Current	30uA
Dynamic Current	<200mA
Unlock Method	Application, Fingerprint, IC Card, Mechanical Key and Passcode.
Unlock Time	1-1.5 seconds
Working Temperature	-25°C~70°C
Working Humidity	10%~95%
Available Mortise	Stainless steel 4585 mortise
User Capacity	IC Card: 200 groups, Fingerprint: 100 groups, Password: 150 groups
Emergency Open	Type C power supply or Mechanical Key
Certifications	China Ministry of Public Security (MA), European CE-RED Directives USA FCC part 15C (FCC ID), Australia C-Tick AS/NZS 4268
Comply to	EN 14846