

LINKO 700 - SERIES

Smart Electronic Lock

Brush Stainless Steel adopt a fully-body design with an elegant appearance combined with superior lock performance.



Application



Bluetooth



IC card



High
Security



Fingerprint



Low Voltage
Alarming



Mechanical
key



Passcode



Wi-Fi


SIRA APPROVED

SKU:LOT-24010

LINKO 700 - SERIES



Exterior

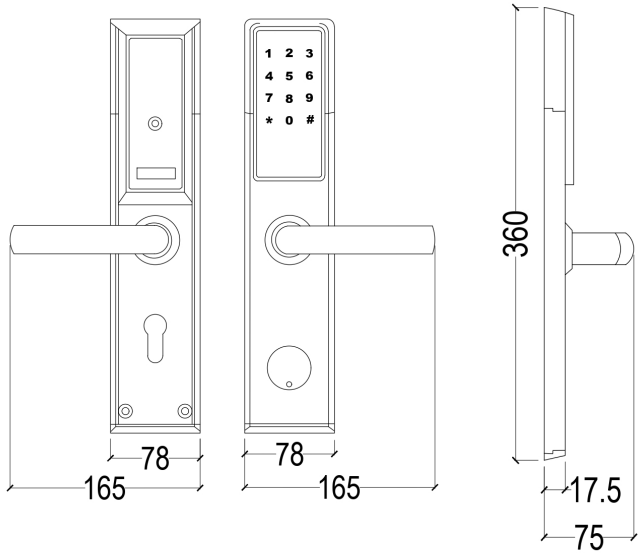

Finishes



Black Nickel



Satin Nickel



Gold Nickel

FEATURES

- ✓ Stainless steel handles with self-lubricating long-life bearings.
- ✓ 3-Point steel latch construction with an anti-friction mechanism.
- ✓ Panic release function - the deadbolt and latch are automatically retracted by inside handle for easy egress in emergency situations.
- ✓ Long lasting Escutcheon and durable handle levers.
- ✓ Lock programming and audit records are not erased during battery replacement.
- ✓ Powered by four (4) AA batteries that provides up to 6-12 months normal life.
- ✓ Unlock with Application, Fingerprint, IC Card, Mechanical Key and Passcode.
- ✓ Check latest 6 months' operation records in LinkO App.
- ✓ Easy to install with minimal drilling required.
- ✓ Emergency charging available when battery power is low.
- ✓ Lock case made of stainless steel, improve safety factor

TECHNICAL SPECIFICATIONS

Material	Escutcheon and Handles (Stainless steel quality SUS304) RFID and Battery Cover: Polycarbonate UL94V0 (Makrolon 6555)
Available Color	Black Nickel, Gold Nickel and Satin Nickel
Door Thickness	40-60(mm)
Communication	Bluetooth 4.0 BLE or Wi-Fi
Battery Life	10,000 times normal open (12 months)
Power Supply	DC6v: 4pcs AA Alkaline batteries
Static Current	30uA
Dynamic Current	<200mA
Unlock Method	Application, Fingerprint, IC Card, Mechanical Key and Passcode.
Unlock Time	1-1.5 seconds
Working Temperature	-25°C~70°C
Working Humidity	10%~95%
Available Mortise	Stainless steel 6098 Mortise
User Capacity	IC Card: 200 groups, Fingerprint: 100 groups, Password: 150 groups
Emergency Open	Type C power supply or Mechanical Key
Packing	Carton box with EPE inside
Comply to	EN 14846

SIRA APPROVED